

seago[®]

COMMERCIAL

**SUPPLYING INDUSTRY AND
MARITIME SECTORS**

FISHING

YACHT CHARTER

WORK BOATS

CONSTRUCTION

SAFETY EQUIPMENT | ROPE | WIRE ROPE | CHAIN

t: +44 (0) 1825 703 500

e: sales@seagocommercial.co.uk

w: www.seagocommercial.co.uk





CONTENTS

Coding Check list	1
Lifejackets & Safety lines	3
Liferafts	5
Liferaft accessories	7
Recovery	9
Pyrotechnics	12
Fire extinguishers	13
Accessories	16

GET IN TOUCH



WELCOME TO SEAGO COMMERCIAL

Our commercial team have put together a check list guide to make your coding requirements a more simple process. All items below can be supplied by Seago. Not all items are listed within this commercial brochure please enquire using any of the contact methods at the bottom of the page.

m = Nautical Miles	Category 0		Category 1	
	Unrestricted		> 60m & < 150m	
	Sailing Vessel	Motor Vessel	Sailing Vessel	Motor Vessel
Seago SOLAS Flat A Pack 6, 8, 10, 12, 16 (Flat Pack)*	2	2	1	1
Seago Seamaster ISO9650-1 SOLAS B Pack 4, 6, 8, 10 & 12				
Hammar / Thanner Hydrostatic Release	2	2	1	1
Seago Heavy Duty Elite Liferaft Cradle (Vertical)	2	2	1	1
Seago Heavy Duty Premium Cradle (Horizontal)				
Seago Horseshoe Set Complete with SOLAS Light	2	2	2	2
Seago Horseshoe				
Seago Horseshoe Bracket				
18m of 8mm Orange Floating Line with Clip	1	1	1	1
Seago Lifebuoy Drogue and Pocket	2	2	2	2
Seago Ocean Danbuoy & Light	1		1	
Throwing Line and Holder	1	1	1	1
Seago 3Dynamic 300N Pro Auto/Harness (Light Fitted)	1 PP + 2 Spare			
Seago Active 190N Pro Auto/Harness (Light Fitted)				
Seago Red Hand Flare MED	6	6	6	6
Seago Red Parachute Rocket MED	12	12	6	6
Seago Buoyant Orange Smoke MED	2	2	2	2
Flare Container Large	1	1	1	1
Thermal Protective Aid (TPA)	1 PP	1 PP	1 PP	1 PP
Hand Held VHF Radio	1	1	1	1
Category 1 EPIRB	1	1	1	1
Radar SART	1	1	1	1
SOLAS No.2 Card	1	1	1	1
Code of Practice Training Manual	1	1	1	1

Category 2		Category 3		Category 4		Category 5		Category 6	
> 20m & < 60m		< 20m		<20m Daylight & Favourable Weather		<20m NDP Daylight & Favourable Weather		<3m NDP Daylight & Favourable Weather	
Sailing Vessel	Motor Vessel	Sailing Vessel	Motor Vessel	Sailing Vessel	Motor Vessel	Sailing Vessel	Motor Vessel	Sailing Vessel	Motor Vessel
1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1
2	2	2	2						
				1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1
2	2	2	2						
1		1		1		1		1	
1	1	1	1	1	1	1	1	1	1
1 PP + 2 Spare	1 PP + 2 Spare	1 PP + 2 Spare	1 PP + 2 Spare	1 PP + 2 Spare	1 PP + 2 Spare				
6	6	6	6	2	2	2	2	2	2
4	4	4	4						
2	2	2	2	2	2	2	2	2	2
1	1	1	1	1	1	1	1	1	1
1 PP	1 PP	1 PP	1 PP	1 PP	1 PP				
1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1
1	1	1	1	1	1	1	1	1	1

LIFEJACKETS & SAFETY LINES



LIFEJACKETS & SAFETY LINES



Seago have been a leading brand in lifejackets for the past 17 years and have a range of ISO and SOLAS approved jackets to suit a variety of industries. All jackets are designed and tested by our expert team to incorporate the best and latest technologies and fabrics. All Seago lifejackets have an 'S' design lung which is shaped to direct water that flows in between the lung when inflated away from the face. The cylinder Safe mechanism used on Seago lifejackets is a feature that stops the loosening of the cylinder preventing non inflation.



SEAGUARD

The versatile Seaguard is a lightweight lifejacket with a round neck design. Available in 3 colours with Nylon cover or a wipe clean model for work boats in 1 colour. Available in 165 newton or 300 newton.



- ISO 12402-3 (150 Newton)
- ISO 12402-2 (275 Newton)
- Cylinder safe
- UML Activator
- Round neck design
- Compact & lightweight
- Nylon cover or wipe clean



SOLAS APPROVED

Designed to SOLAS Ships wheel to meet MCA requirements. The round neck design is hard wearing and comfortable. Available in 165 newton or 300 newton.



Ideal for general heavy use commercial and professional purpose. High abrasion resistant cover.

- SOLAS/MED approved
- Cylinder safe
- 2 x UML Activators
- Round neck design
- Compact & lightweight
- Nylon cover or wipe clean

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk



ACTIVE

The Active lifejacket is the perfect match for crew members and sailing professionals that need compact design for everyday use. Available with spray hood and light fitted. Available in 190 newton or 300 newton.



Available in pro model which includes an automatic light and spray hood fitted.

- ISO 12402-3 (150 Newton)
- ISO 12402-2 (275 Newton)
- Cylinder safe
- UML Activator
- Round neck design
- Nylon cover
- Compact with zipper closer



3DYNAMIC

A premium fitted lifejacket with rapid fastening, spray hood and light. The high abrasion resistant Nylon cover provides protection for heavy everyday use. Available in 190 newton or 300 newton.




Ideal for racing conditions and skippers requiring supreme fit with spray hood and light fitted.

- ISO 12402-3 (150 Newton)
- ISO 12402-2 (275 Newton)
- Cylinder safe
- UML Pro Elite
- Contoured design
- Quick fit buckle system
- Zip pocket

SAFETY LINES

All Seago safety lines are ISO certified and conforms to latest PPE regulation (EU) 2016/425, EN ISO 12401 :2009 requirements. We have colour coded these to make choosing the right line easy. All safety lines include an overload indicator.

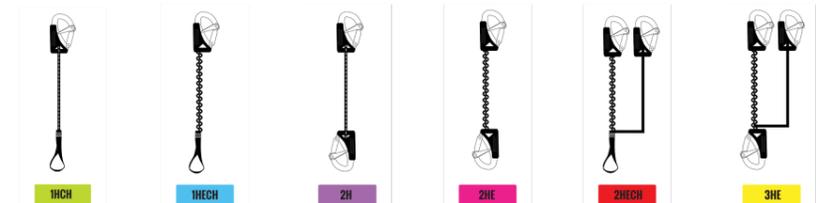

Chose from a combination of either standard webbing or elasticated webbing with quick release safety hook or cow hitch. All using high strength narrow gauge webbing and 316 marine grade stainless steel for the safety hooks.

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk

LIFERAFTS



Seago liferafts are highly regarded in the maritime safety industry as high quality and affordable. All liferafts have butyl rubber tubes making them extremely durable and robust. The canopy is made from a rip-stop Nylon offering protection from the elements and preventing fabric cracking from long periods of being folded.

All Seago liferafts are either SOLAS approved or ISO approved and can be used in all commercial, leisure or racing situations.

Rain water collection system. Rain water is gathered from a pocket on the outside of the canopy that runs into the pouch.



Boarding hand ladder is used to pull yourself into the raft from the water.




ISO 9650-1 MODEL



Internal LED lamp for night time visibility with 8 hours use. The lamp can be switched off when not required.



Insulated floor helps keep in the heat and reduce the cold penetrating.



ISO 9650-1 Canister

Capacity	4	6	8	10	12
Length (mm)	730	730	780	780	880
Width (mm)	490	490	530	530	550
Height (mm)	310	310	365	390	380
Weight (Kg)	37	43	48	54	62



CANISTER MODEL (in premium cradle)

ISO 9650-1 Valise

Capacity	4	6	8	10
Length (mm)	650	720	720	720
Width (mm)	300	340	340	360
Height (mm)	42	460	460	500
Weight (Kg)	30	35	41	46



VALISE MODEL

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk

LIFERAFTS

CYLINDER MODEL



FLAT PACK MODEL



SOLAS 'A' CYLINDER

Capacity	6	8	10	12	16	20	25
Length (mm)	1050	1085	1185	1250	1200	1450	1450
Diameter (mm)	590	644	644	644	690	690	690
Weight (Kg)	85	98	108	125	146	168	178

SOLAS 'B' CYLINDER


Capacity	6	8	10	12	16	20	25
Length (mm)	1050	1050	1050	1085	1185	1200	1200
Diameter (mm)	590	590	590	644	644	690	690
Weight (Kg)	73	77	81	97	113	120	125

SOLAS 'A' FLAT PACK

Capacity	6	8	10	12	16
Length (mm)	830	800	950	950	1100
Width (mm)	560	600	650	650	700
Height (mm)	380	400	420	420	450
Weight (Kg)	75	85	95	110	132

SOLAS 'B' FLAT PACK

Capacity	6	8	10	12	16
Length (mm)	780	830	880	950	950
Width (mm)	530	560	600	650	650
Height (mm)	350	380	400	420	420
Weight (Kg)	62	68	75	85	98

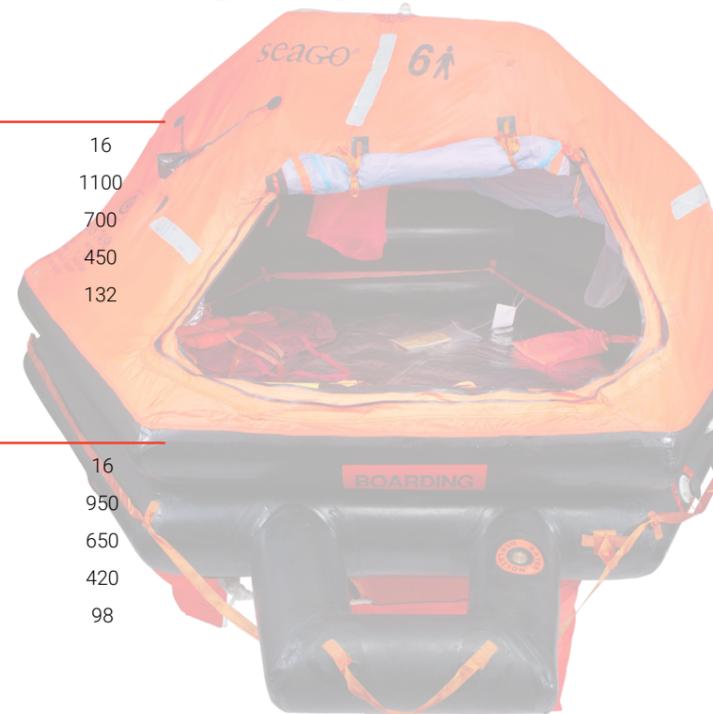

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk



To complete the installation of a liferaft Seago have developed 2 stainless steel universal cradles and a webbing deck strap option to give the best and most secure fit. Seago have also teamed up with Thanner who are manufacturers of very high grade hydrostatic release systems for both leisure and commercial applications.

For vessels needing additional safety packs to accompany an existing liferaft to pass MCA inspection coding Seago have you covered with a selection of grab bags and contents.

PREMIUM LIFERAFT CRADLE



This premium product is made from high strength marine grade 316 stainless steel. The frame is fully adjustable to accept most life rafts from sizes 4 to 12 person and can be mounted on the push-pit, deck or coach roof. Adjust the mounting brackets on the frame by sliding in both horizontal and vertical directions to cater for most push-pit configurations. The life raft is securely retained by a high strength polyester webbing strap. The raft can be quickly released using the quick release buckle. Hydrostatic release mechanisms can also be fitted.

- Universal fixing mechanism
- Quick release buckle
- Adjustable rail mount
- Heavy duty 316 stainless steel
- Adjustable webbing straps
- Market leading specification
- Suitable for 4-12 man raft
- Can be rail or deck mounted

Depth (mm)	260
Width (mm)	680-900
Height (mm)	430
Weight (kg)	3.2

(rail mounting only suitable up 8 person liferaft)

ELITE LIFERAFT CRADLE



The Elite vertical cradle is fully adjustable to allow perfect fitting of liferafts from 4 person to 16 person. Made from the best marine grade 316 stainless steel this robust cradle is ideal for anyone needing a great way to store and access their liferaft. The Elite cradle can be mounted either vertically or horizontally and will work with a hydrostatic release unit, all webbing straps and fittings are provided as part of the complete package.

- Vertical and horizontal mount
- Quick release buckle
- Fully universal adjustment
- Heavy duty polished 316 stainless steel
- Adjustable webbing straps
- Market leading specification
- Suitable for 4-16 man raft
- Can be rail or deck mounted

Depth (mm)	290-465
Width (mm)	520-764
Height (mm)	782
Weight (kg)	8.8



WEBBING DECK STRAP



The Seago deck straps for life rafts can be mounted on your deck or coach roof providing means to access your life raft in an emergency situation. All the fittings are 316 stainless steel marine grade. The deck straps are secured with a quick release link which can be used for a hydrostatic system.



24 HOUR GRAB BAG



All 24 hour grab bags contain enough rations and water for each person in a liferaft each pack has different amounts depending on the raft capacity and requirement. Additional first aid kit, torch red hand flares and thermal protective aids are included in a 24 hour pack. All contents are contained within a Seago 50 litre high visibility waterproof bag.

- 3 x Red hand fares
- Waterproof SOLAS approved torch
- Thermal protective aids
- ISAF first aid kit
- Water rations (1.5L per person)
- Food rations (10'000kj per person)

SOLAS B GRAB BAG



The most common requirement for coding is an additional SOLAS B pack to accompany an ISO9650-1 Liferaft. In addition to the contents of the type 1 liferaft the following contents are included in a Seago SOLAS B pack to bring the raft up to coding requirements:

- Radar reflector
- Category C first aid kit
- Thermal protective aids
- Sea anchor
- Buoyant orange smoke
- 50 Litre dry bag

THANNER HYDROSTATIC RELEASE



Thanner Disposable Hydrostatic Release Units are all patented units, designed for trouble free installation, reliable function and service free lifetimes of 4 years /48 months or 2 1/2 years /30 months after correct installation. The units are all approved to the new MED and SOLAS regulations together with ships wheel approval, USCG, TC and many others. The units are made from stainless steel and UV- resistant plastics to meet the tough requirements of the marine environment. The units operate independently of the life raft buoyancy and is approved for all sizes of life raft! up to a buoyancy load of 1500kgs. All parts can be recycled and are made from non-toxic materials. Special versions/other release depths are available on request.

- Operating independently of life raft buoyancy.
- 4-year Operational Service Life
- No servicing requirements. Weight 300 g.



Seago have a great range of recovery equipment for man overboard situations from traditional horseshoe sets to Seago developed rescue platforms. Getting a man overboard from the water back on board the vessel is a challenging task. Ensuring that the MOB is marked in the water as soon as possible is key to the rescue giving the skipper time to about turn into position to make the pickup. Having the right equipment aboard the vessel is vital.

HORSESHOE LIFEBOUY SET



A traditional horseshoe lifebuoy foam filled with wipe clean cover. The horseshoe is available on it's own or with a SOLAS approved led light with lithium battery and mounting bracket.

This is the perfect set with highly effective automatic light system. Available in 2 colours.

- Horseshoe lifebuoy
- Automatic SOLAS LED light with lithium battery
- Aluminium mounting bracket
- White or yellow options



THROW LINE IN BAG



Offers a quick and very accessible means to recover a man overboard. The stainless steel holder attaches to a rail with the supplied mounts enabling the throw bag to be rapidly deployed when needed. Weighted bag can be thrown a good distance. Including 30m of bright floating line to grab.

- 30m floating line
- Stainless steel holder
- Weighted throw bag
- Fixing kit

SB2 INFLATABLE DANBUOY



The Seago inflatable danbuoy takes up minimal deck space and is always at hand in case of emergency. Protected in a neat storage container that directly fits to any boat rail with the clamps supplied. Once installed the danbuoy is easily deployed ensuring a fast response time.

Rearm using Seago 38g Manual rearming kit

- Deployment pouch for rapid use
- Oral top-up tube
- Rail mountable neat storage container
- Rapid deployment
- Sea drogue



GET IN TOUCH


SB3 INFLATABLE DANBUOY



The SB3 inflatable danbuoy is the newest version of our inflatable danbuoy range with a super stable design that ensures even in the strongest winds and roughest sea it will always return to its upright position. The new design uses a ball like base to achieve its stability. The SB3 has an automatic activation meaning when the SB3 is thrown into the water it will inflate. The storage unit that the SB3 comes with is watertight to stop accidental activation.

- Neat compact container (mm): H300 x W250 x D130
- Robust stainless steel fittings
- Burst hinge protects container and SB3
- Automatic light
- Automatic inflation
- Weighted ball base
- Rapid deployment
- Simple to maintain
- Reusable

(Holder not included - sold separately)

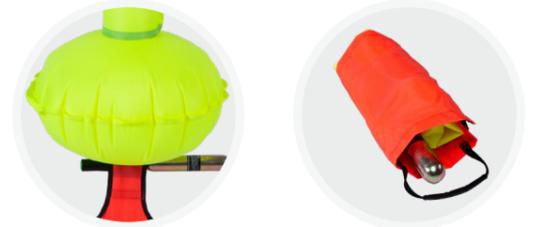

3 IN 1 LIFEBOUY



The Seago 3 in 1 Recovery system is a compact automatically inflating marker buoy with lifebuoy and recovery strop which is the perfect solution for a man overboard situation. The 3 in 1 Recovery system is the ideal replacement for a traditional foam filled horseshoe buoy and rigid danbuoy, the 3 in 1 is weighted and has a sea anchor all packed in a neat waterproof container that fits to a push-pit with a simple clamp system provided.

Rearm using Seago 60g Auto rearming

- Neat compact container
- Robust stainless steel fittings
- Burst hinge protects container and sling
- Automatic light
- Automatic inflation
- Stainless steel carbine with jackstay webbing
- Rapid deployment
- Simple to maintain
- Reusable

Container size (mm): H300 x W250 x D130



RESCUE SLING




The Seago Rescue Sling is easy to use, comes in a waterproof bag with simple instructions printed on the outside in case of emergency use. Rail mountable using a Velcro strap system making light work of attaching the unit. The new design has storm flaps to reduce water entry and has a Velcro fastened top cover with webbing tab for rapid deployment. A webbing handle has been placed on the top of the float to enable the user to take the sling from the bag quickly and easily. The large floating yellow sling has webbing running through it giving it strength.

- 30m Floating braided line
- Anti-chafe cover at one end for attaching to strong point
- Webbing through entire sling for strength

GET IN TOUCH




RIGID DANBUOY MARKER



The new Seago telescopic Rigid Ocean Danbuoy complies with RORC and ISAF racing regulations (when extended). Complete with high visibility red and yellow OSCAR man-over-board flag and 5 metres of floating yellow safety line. High visibility LED, with multi flash function, test facility and minimum 8hrs run time. Built in weight ballast to keep it upright and a very durable PVC flotation device. Stainless Steel Holder (push-pit mountable) for telescopic Dan-buoy available.

- Telescopic
- RORC and ISAF compliant
- Durable, inflatable float
- Concealed lead weight
- Bright yellow to attract attention
- High strength fibreglass construction
- Replaceable LED light
- 5m floating line included
- Spare light and flag also available

(Holder not included - sold separately)

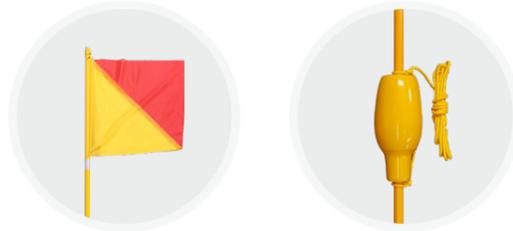

SOLAS LIFEBOUY RING



For commercial ships or big boats. Made of polyethylene and filled with polyurethane foam. With SOLAS retro reflective tape. Additionally approved by Transport Canada and Russian Maritime Register of Shipping.

Part number	LB-2.5	Part number	LB-4
Inner diameter (cm)	43.60	Inner diameter (cm)	43.60
Outer diameter (cm)	75	Outer diameter (cm)	75
Weight (kg)	2.5	Weight (kg)	2.5



GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk



Seago have teamed up with a leading European manufacturer to bring an own brand range of pyrotechnic distress signals. The Seago range covers all required approvals for commercial use. In addition to the pyrotechnic range 2 sizes of water resistant containers are available to store distress signals.

12L Container

3L Container



PARACHUTE ROCKET

Height (mm)	261
Width (mm)	50
Weight (g)	410
Ejection height (m)	300
Burning time (s)	40
Light intensity (cd)	30,000
Expiry	3 Year minimum

For night time distress signalling purposes on ship, lifeboats, life rafts and for pleasure craft. The launching tube is made of resistant plastic to ensure protection in severe marine weather conditions.

The signal is approved in conformity to the last updating of the normative:
SOLAS 74/96 • MED 96/98 EC • Directive 2012/32/EU • IMO Res. MSC. 81 (70) as amended.



RED HAND

Height (mm)	235
Width (mm)	25
Weight (g)	200
Burning time (s)	> 60
Light intensity (cd)	15,000
Expiry	3 Year minimum

For night - time distress signalling purposes on ships, lifeboats, life rafts and for pleasure craft. Tube is made of corrosion-resistant steel with a shockproof plastic handle.

The signal is approved in conformity to the last updating of the normative:
SOLAS 74/96 • MED 96/98 EC • Directive 2013/32/EU • IMO Res. MSC. 81 (70) as amended.



BUOYANT ORANGE SMOKE

Height (mm)	120
Width (mm)	83.5
Weight (g)	480
Smoke duration time (s)	120
Expiry	3 Year minimum

For daylight distress signalling purposes on ship, lifeboats, life rafts and for pleasure craft. The case is made of corrosion-resistant steel

The signal is approved in conformity to the last updating of the normative:
SOLAS 74/96 • MED 96/98 EC • Directive 2012/32/EU • IMO Res. MSC. 81 (70) as amended.



ORANGE HAND SMOKE

Height (mm)	137
Diameter (mm)	42
Weight (g)	116
Burning time (s)	60
Expiry	3 Year minimum

A daylight smoke signal Ideal for personal use on small boats, kayaks, paddle boards and windsurfers. Shockproof plastic tube.

The signal is approved in conformity to the last updating of the normative CE: Directive 2013/29/EU



(other pyrotechnics available)

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk

FIRE EXTINGUISHERS



Used to protect machinery/plant and where there is a risk of fire such as in boat/vehicle engine compartments. Ideal for use in sensitive locations and are a suitable option to protect high-value assets such as precious items storage, computing technology and telecommunications facilities. The unit required is determined by the gross volume of that compartment. Only one unit should be installed in any one compartment and should provide the total protection required for that compartment. The compartment should have no unnecessary ventilation that would allow needless loss of suppressant.

CLEAN AGENT - 1KG

Fire Rating:	B C
Height:	330mm
Capacity:	1 Kilogram
Cylinder Diameter:	95mm inc. bracket
Filled Weight:	2.1Kg
Operating Temperature:	79°C
Maximum Area Protected:	1.7 m3
Working Pressure:	12 Bar
Duration Of Discharge:	7 Seconds
Temperature Range:	-30° To +60°C
CE Approved:	Yes

CLEAN AGENT - 1.5KG

Fire Rating:	B C
Height:	380mm
Capacity:	1.5 Kilogram
Cylinder Diameter:	125mm inc. bracket
Filled Weight:	3.1Kg
Operating Temperature:	79°C
Maximum Area Protected:	2.5 m3
Working Pressure:	12 Bar
Duration Of Discharge:	9 Seconds
Temperature Range:	-30° To +60°C
CE Approved:	Yes

CLEAN AGENT - 2KG

Fire Rating:	B C
Height:	380mm
Capacity:	2 Kilogram
Cylinder Diameter:	125mm inc. bracket
Filled Weight:	3.6Kg
Operating Temperature:	79°C
Maximum Area Protected:	3.4 m3
Working Pressure:	12 Bar
Duration Of Discharge:	9 Seconds
Temperature Range:	-30° To +60°C
CE Approved:	Yes



GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk

FIRE EXTINGUISHERS



Products Kitemarked and Certified by DNV to MED "Ships Wheel" - meets the recommendations of the Royal Yachting Association and the requirements of the environmental Authority / British Waterways Board Joint Boat Safety Scheme. Ideal for use in vehicles, caravans, boats, agricultural machinery, farms, garages, in the home, offices, and for a wide range of industrial and commercial applications.



DRY POWDER MANUAL 1KG

Fire rating:	A B C Dry Powder (5A / 34B)
Height:	364mm
Capacity:	1 Kilogram
Cylinder Diameter:	130mm
Filled Weight:	2.12Kg
Operating Temperature:	20°C
Discharge range:	4m
Working Pressure:	14 Bar
Minimum burst pressure:	55 Bar
Duration Of Discharge:	7 Seconds
Temperature Range:	-30° To +60°C
CE Approved:	Yes
DNV & MED (Ships Wheel):	Yes

DRY POWDER MANUAL 2KG

Fire rating:	A B C Dry Powder (5A / 34B)
Height:	380mm
Capacity:	2 Kilogram
Cylinder Diameter:	140mm
Filled Weight:	3.65Kg
Operating Temperature:	20°C
Discharge range:	5m
Working Pressure:	14 Bar
Minimum burst pressure:	55 Bar
Duration Of Discharge:	15 Seconds
Temperature Range:	-30° To +60°C
CE Approved:	Yes
DNV & MED (Ships Wheel):	Yes

DRY POWDER AUTO 1KG

Fire Rating:	A B C
Height:	330mm
Capacity:	1 Kilogram
Cylinder Diameter:	80mm
Filled Weight:	2.1Kg
Operating Temperature:	20°C
Maximum Area Protected:	1 m2
Working Pressure:	12 Bar
Duration Of Discharge:	7 Seconds
Temperature Range:	-20° to +60°C
CE Approved:	Yes

DRY POWDER AUTO 2KG

Fire Rating:	A B C
Height:	380mm
Capacity:	2 Kilogram
Cylinder Diameter:	80mm
Filled Weight:	3.6Kg
Operating Temperature:	20°C
Maximum Area Protected:	2 m2
Working Pressure:	12 Bar
Duration Of Discharge:	7 Seconds
Temperature Range:	-20° to +60°C
CE Approved:	Yes

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk

FIRE EXTINGUISHERS



Used in industrial and commercial premises, offices, petrol filling stations, chemical paint houses, boats, lorries. Also very effective on fires caused by the combustion of flammable liquids and materials that liquefy such as plastic, oils, greases, paints, tar...
Safe, if used in error, on live electrical equipment, since the spray is non-conductive and complies with dielectric test to EN3-7 clause 9.
(Model tested to the BS EN3 35,000V dielectric test as defined by BSEN3-7:2004 + A1:2007).

FOAM AFFF - 6KG

Fire Rating:	A B (13A / 144B)
Height:	550mm
Capacity:	6 Kilogram
Cylinder Diameter:	220mm
Filled Weight:	10.4Kg
Operating Temperature:	20°C
Working Pressure:	12 Bar
Discharge range:	5m
Duration Of Discharge:	30 Seconds
Temperature Range:	-20° to +60°C
CE Approved:	Yes



Wood, paper, textiles



Flammable liquids



These 0.60 kg & 0.95 kg BC Powder Fire Extinguishers are designed for use in all types of motor vehicles, caravans and most areas around the home. Suitable for B and C class fires caused by: petrol (leaded or unleaded), diesel, oil, gas, paints, solvents, greases, and also fires involving electrical equipment, and gaseous fires.

DRY POWDER COMPACT AEROSOL - 0.6KG

Fire Rating:	B C (21B)
Height:	281mm
Capacity:	0.6 Kilogram
Cylinder Diameter:	94mm
Filled Weight:	0.76Kg
Working Pressure:	18 Bar
Discharge range:	2-3m
Duration Of Discharge:	6 Seconds
Temperature Range:	-20° to +60°C
CE Approved:	Yes



Flammable liquids



Flammable gases

ACCESSORIES

Seago can supply a host of service items and safety pack items to meet your requirements. Below is a list of the most common parts requested. If what you need is not shown here please get in touch with a member of the team and we will be able to help.



50L Dry bag



Sea Anchor



Radar reflector



Mini manual indicator



MK5 Indicator



Micro manual indicator



Pro Elite cartridge



Pro Sensor cartridge



MK5 Cartridge



HR Super bobbin



CO2 Cylinders



Hammar A1



Hammar MA1EC



Hammar H20-100



Hammar H20-200



Water rations



Food rations



TPA

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk

GET IN TOUCH

+44 (0) 1825 703 500 | sales@seagocommercial.co.uk | www.seagocommercial.co.uk

