

# c-pod.<sup>®</sup> Lite

## Installation Manual User Guide



# Contents

## **Installation manual – p. 2**

- 1.** Creating the user account
- 2.** C-pod Lite start up
- 3.** Install the C-pod Lite unit
- 4.** Purchase a service plan.

## **User Guide – p. 6**

- 1.** Configure the account
- 2.** Replace the internal battery


**Tip:** You can click on all blue links and e-mail addresses in the manual instead of manually entering them.

# Installation Manual

## 1. Creating the user account


### a. Download the app

The app "Asset Protection" is downloaded from Google play (Android) or the Appstore (iOS).



### b. Open the app


"Asset Protection" and you should see the screen below.

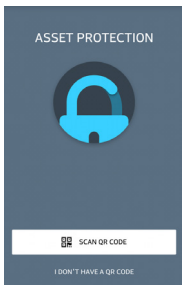

c. Press the **Scan QR Code** button and scan the QR code on the sticker with your mobile.




d. The user account has been created. The next step is to turn on the unit to get a GPS position.

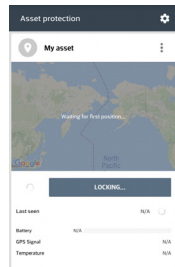

## 2. C-pod Lite start up

### a. Open the unit

Place the C-pod Lite with the backside facing up (the black side without the sticker) and open it by inserting a screwdriver, or similar, into the slots on the edge of the long side and gently bend until the lid loosens.

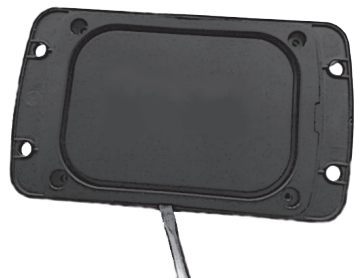

# Installation Manual

## 2. Turn on the C-pod Lite unit (continued)

### b. Turn on the unit



Remove the cover and turn on the device by sliding the small black slide switch, located between the battery and the battery connector, toward the battery. The LED lights will flash for 5 minutes and then shut down to save power.



Replace the cover and make sure that the soft part inside the cover is placed over the battery.

### c. Position appears in the app

When the device is turned on its position will appear in the app. Make sure you have a position, battery voltage and OK for GPS signal.

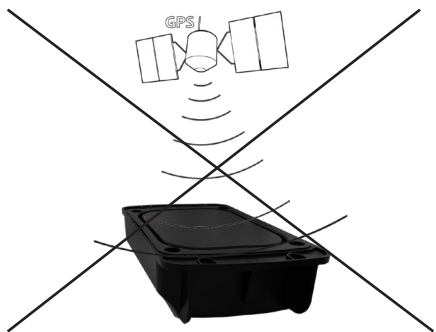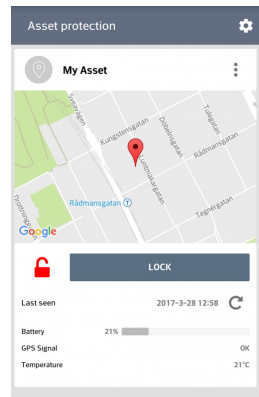

**Tip:** The label should face the sky in order to obtain the strongest GPS signal. The device should not be placed with the back cover facing the sky.

# Installation Manual

## 2. Turn on the C-pod Lite unit (continued)

### d. Close the device

Mount the the four supplied screws into the cover of the C-Pod Lite. They will ensure the water protection and that the lid does not fall of if the unit is in a tough environment.




### e. Remove the label/protective film

Remove the label/protective film with the QR code from the device before attaching the unit to the property you want to protect. The label does not withstand high temperatures and may melt from the heat in, for example, an outboard engine.



## 3. Install the C-pod Lite unit

The device should not be placed with the back cover facing the sky, all other positions are appropriate to get a good GPS signal. If you use the supplied special adhesive tape instead of screws, we recommend that you attach the front of the unit to the surface to facilitate future battery replacement.

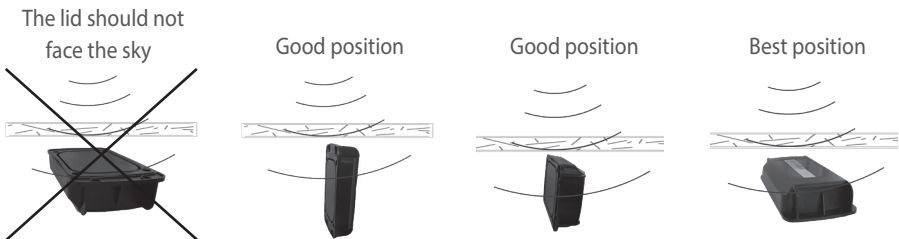

## 4. Purchase a service plan

C-pod Lite communicates via the GSM network and require an active subscription to work. Register and pay the subscription service at: <https://webshop.c-pod.com/en/c-pod-lite/>


For questions, please call our customer service at +46 8 5000 10 53/54 or send an Email to [support@c-pod.com](mailto:support@c-pod.com).

# User Guide

## 1. Configure the account

### a. Name your account


Press the “vertical dots” icon next to “My Asset” and type in the name you want to give your account.

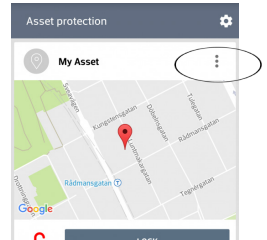


### b. Add alarm receivers

Alarm recipients will receive SMS/E-mail if the property moves more than 100m in radius.


Press the Settings menu (cogwheel icon) in the upper right corner.

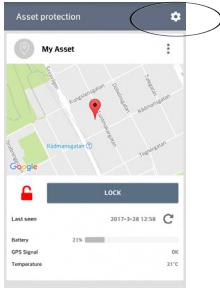

Press “contacts” followed by “New”

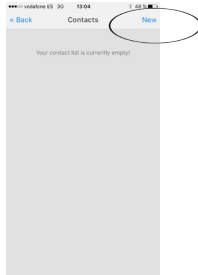


Enter the information in “New contact”. Then press “save”

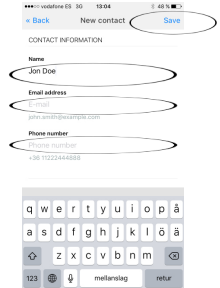


### c. Activate the movement alarm

Alarm recipients will receive SMS/E-mail if the property moves more than 100m in radius.


Press the “Lock” button

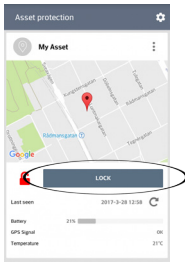


Press “Lock” button again or “Cancel” to cancel.

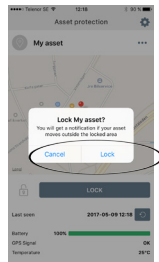

The safe zone area is displayed within no alarm will be sent appears on the app

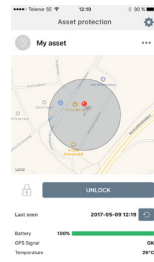

If the property is moved outside the area, alarms are sent

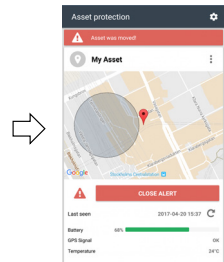

# User Guide

## 2. Replace the internal battery

### a. Open the device

Place the C-Pod Lite with the back cover facing up (black side without label) and open it by inserting a screwdriver, or similar, into the slots on the edge of the long side and gently bend until the lid loosens.

### b. Remove the battery

The battery is attached with a strong silicone. Pull the battery upwards until it loosens.

**Tip:** The battery is too tight to remove with your fingers. Use a screwdriver to loosen the battery.

Remove the battery connector by pulling both cables straight upwards.

### b. Insert the battery

Insert the new battery as shown in the picture. You can purchase the battery at the webshop: <http://webshop.c-pod.com/en/c-pod-lite/>

Attach the battery connector by pushing it into the socket with the flange in the slot as shown.



**Tip:** Additional battery is purchased at <http://webshop.c-pod.com/en/c-pod-lite/>.

[www.c-pod.com](http://www.c-pod.com)