

ANCHORLIFT[®]

WORLD CLASS WINDLASS SYSTEM

MAKO 1500

HIGH SPEED
WINDLASS

Boats 40ft to 60ft. 12m to 18m.

M1512
M1524




M1512C
M1524C



Model No:

- M1512-8** Low profile 1500w 12v 8mm chain
- M1512-10** Low profile 1500w 12v 10mm chain
- M1512C-8** Capstan model 1500w 12v 8mm chain
- M1512C-10** Capstan model 1500w 12v 10mm chain
- M1524-8** Low profile 1500w 24v 8mm chain
- M1524-10** Low profile 1500w 24v 10mm chain
- M1524C-8** Capstan model 1500w 24v 8mm chain
- M1524C-10** Capstan model 1500w 24v 10mm chain

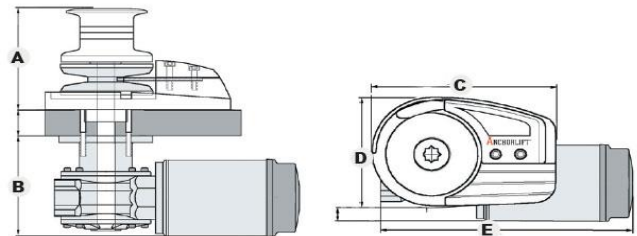

Motor gear can be mounted all 4 directions.

	A	B	C	D	E
Mm.	165	127	255	170	310
Inches	6,49	5,00	10,03	6,69	12,20

Motor: 1500w 12v or 24v

Max working load: 485kg / 1067lbs

Max Power Pull: 1185kg / 2607lbs

Speed down: Approx 38m / 126ft min

Speed up 24v: 110kg / 240lbs load 21m/71ft min

Speed up 12v: 100kg / 240lbs load 21m/71ft min

Amp draw down: 55amp 12v / 30amp 24v

Amp draw up: Normal load 115amp 12v / 65amp 24v

Chain length used: 50m to 75m

Anchors: 20kg/44lbs to 45kg/99lbs

Circuit breaker: 135amp 12v / 80amp 24v

Cable size: 50mm² / 0AWG (normal cable length)

Switch gear: Helm switch, toggle type part 90800 rocker type with on/off 90801, Footswitch 90900

Radio remote 91354. Combo switch pack 92135(12v) 92080(24v)

Max recommended ground tackle weight, anchor + chain: 160kg / 352lbs.

Warranty: Pleasure boats 5 years

Navy boats, Patrol boats. 5 years

Commercial use fishing boats 2 years.



